



For the Name and Products You Can Trust!



Product Gallery



3750 Black Exterior Folding Window & Swing Door



3750 Black Exterior Folding Window



3750 White Corner Folding Door

Product Gallery



2750 Beige Multi Slide with Black Signature Handle Option



3750 Bronze Exterior Multi Slide



3750 Multi Slide System

Features and Benefits

■ Sizing

- Standard sizing in 9', 12', and 15' x 8' in 3 panel Configuration.
- Standard sizing in 12', 16', and 20' x 8' in 4 panel Configuration.
- Maximum panel size is 5' x 8' or 40 sq ft.
- Maximum frame width of 3 panel door system at 15'.
- Maximum width of 4 panel door system at 20'.
- Custom sizing available.

■ Frame

- KD or welded main frame.
- 7 $\frac{3}{4}$ " total width 6 $\frac{3}{4}$ " jamb depth all PVC multi-chambered profile frame system (on 3 panel).
- 10 $\frac{3}{16}$ " total width 9 $\frac{3}{16}$ " jamb depth all PVC multi-chambered profile frame system (on 4 panel).
- Integrated nail fin application with 1" or 1 $\frac{3}{8}$ " set back.
- Full length weather stripping on all 4 frame components.
- Integrated sill drainage with snap-in sill covers.

■ Sash

- Fully welded vinyl sash with internal aluminum reinforcement with $\frac{7}{8}$ " standard IG, or a 1 $\frac{1}{4}$ " triple insulated glass system.
- Many high energy-efficient glass options for the most extreme temperature sensitive regions.
- Standard glazing, Cardinal™ LoE 366® dual glazed tempered glass.
- All stiles are metal reinforced for extreme wind load resistance.
- Unique internal drainage system to minimize risk of seal failures.
- Interior glazed for better performance.

■ Hardware

- Truth Nexus 2 point lock with opposing lock points.
- Anti-lock feature preventing a "false" sense of lock up.
- Flush mount handle - does not protrude into the room.
- Deep finger pocket - provides superior grip area for moving large door panels.
- Recessed thumb slide intuitive locking and unlocking of panel.
- Stainless steel roller housing and composite wheels with side adjustment, AAMA rated to carry a 500 pound panel for 10,000 cycles without change to adjustment.
- Hardware colors; white, black powder coat, and brushed chrome.

■ Extruded Vinyl Colors



■ Option Exterior Stocked Colors



Optional

- Black Interior and Exterior Specialty Laminate

Featuring **WINSHIELD**



Signature (Option)

Flush Mount (Standard)



3750 Sliding Door System

Features and Benefits

Frame

- 5 $\frac{1}{8}$ " KD or welded main frame with integral pre-punched nailing flange with either a 1" or 1 $\frac{3}{8}$ " set back.
- Sloped aluminum anodized threshold cover.
- Integrated screen channel in the frame with aluminum screen track for ease of operation and long term durability.
- Anodized aluminum track.

Sash

- Fully welded 3 $\frac{3}{4}$ "x 1 $\frac{1}{4}$ " vinyl sash with internal aluminum reinforcement.
- Standard $\frac{7}{8}$ " IG, or a 1 $\frac{1}{4}$ " triple insulated glass system.
- Many high energy-efficient glass options for the most extreme temperature sensitive regions.
- Standard glazing, Cardinal™ LoE 366® dual glazed tempered glass with warm-edge spacer system.
- All stiles are metal reinforced for extreme wind load resistance.
- Unique internal drainage system to minimize risk of seal failures.
- Interior glazed for better performance.
- Stainless steel roller housing and composite wheels with side adjustment, AAMA rated to carry a 500 lb panel for 10,000 cycles without change to adjustment.
- Truth's Anti-Slam and double point lock. Meets the most stringent forced entry resistance testing.

Hardware

Hardware colors; white, beige, black powder coat, and brushed chrome.

Extruded Vinyl Colors

White

Almond

Optional Exterior Stocked Colors

Taupe
Euro
Finish

Beige
Euro
Finish

Bronze
Laminate

Jet
Black
Laminate

Optional

Black Interior and Exterior
Specialty Laminate

Featuring **WINSHIELD**

Jet
Black



Signature (Standard)

Flush Mount (Option)



2750 Multi Slide System

Features and Benefits

■ Sizing

- Standard sizing in 9' x 8' and 12' x 8' in 3 panel configuration.
- Standard sizing in 12' x 8' and 16' x 8' in 4 panel configuration.
- Maximum panel size is 4' x 8'.
- Maximum frame width of 3 panel door system at 12'.
- Maximum width of 4 panel door system at 16'.
- Custom sizing available.

■ Frame

- KD or welded main frame.
- 7 $\frac{3}{4}$ " total width 6 $\frac{3}{4}$ " jamb depth all PVC multi-chambered profile frame system (on 3 panel).
- 10 $\frac{3}{16}$ " total width 9 $\frac{3}{16}$ " jamb depth all PVC multi-chambered profile frame system (on 4 panel).
- Integrated nail fin application with 1" or 1 $\frac{3}{8}$ " set back.
- Full length weather stripping on all 4 frame components.
- Integrated sill drainage with snap-in sill covers.

■ Sash

- Fully welded vinyl sash with internal aluminum reinforcement with $\frac{7}{8}$ " standard IG, or a 1 $\frac{1}{4}$ " triple insulated glass system.
- Many high energy-efficient glass options for the most extreme temperature sensitive regions.
- Standard glazing, Cardinal™ LoE 366® dual glazed tempered glass.
- All stiles are metal reinforced for extreme wind load resistance.
- Unique internal drainage system to minimize risk of seal failures interior glazed for better performance.

■ Hardware

- Truth Nexus 2 point lock with opposing lock points.
- Anti-lock feature preventing a "false" sense of lock up.
- Stainless steel roller housing and composite wheel with end adjustment, AAMA rated to carry a 500 pound panel for 10,000 cycles without change to adjustment.
- Hardware colors; white, beige, black powder coat, and brushed chrome.

■ Extruded Vinyl Colors



■ Optional Exterior Stocked Colors



■ Optional

- Black Interior and Exterior Specialty Laminate

Featuring **WINSHIELD**



Standard

Signature (Optional upgrade)



2750 Sliding Door System

Features and Benefits

Frame

- 5 $\frac{1}{16}$ " KD or welded main frame with integral pre-punched nailing flange with either a 1" or 1 $\frac{1}{2}$ " set back.
- Sloped aluminum anodized threshold cover.
- Integrated screen channel in the frame with aluminum screen track for ease of operation and long term durability.
- Anodized aluminum track.

Sash

- Fully welded 2 $\frac{3}{4}$ "x 1 $\frac{3}{4}$ " vinyl sash with internal aluminum reinforcement.
- Standard $\frac{7}{8}$ " IG, or a 1 $\frac{1}{4}$ " triple insulated glass system.
- Many high energy-efficient glass options for the most extreme temperature sensitive regions.
- Standard glazing, Cardinal™ LoE 366® dual glazed tempered glass with warm-edge spacer system.
- All stiles are metal reinforced for extreme wind load resistance.
- Unique internal drainage system to minimize risk of seal failures.
- Interior glazed for better performance.
- Stainless steel roller housing and composite wheels with side adjustment, AAMA rated to carry a 500 lb panel for 10,000 cycles without change to adjustment.
- Truth's Anti-Slam and double point lock. Meets the most stringent forced entry resistance testing.

Extruded Vinyl Colors

White

Almond

Optional Exterior Stocked Colors

Taupe
Euro
Finish

Beige
Euro
Finish

Bronze
Laminate

Jet
Black
Laminate

Optional

- Black Interior and Exterior Specialty Laminate

Featuring **WINSHIELD**

Jet
Black

Hardware

Hardware colors; white, beige, black powder coat, and brushed chrome



Standard

Signature (Optional upgrade)





3750 Swing Door System

Features and Benefits

- Welded vinyl main frame with internal aluminum reinforcement with the option of a 1" or a 1 3/8" nailing flange.
- Foam backed weather seal on main frame.
- Contemporary style vinyl sash with internal aluminum reinforcement.
- Welded sash corners.
- Adjustable contemporary European hinges.
- Stainless multipoint locking hardware on both active and inactive sash.
- Bronze and commercial clear anodized aluminum sill covers inside and outside.

■ Sizes

- New Construction / Replacement.
- Custom applications.

■ Glass Options

- Cardinal™ LoE 366® Dual Glazed tempered glass.
- Edgetech® warm-edge spacer system.
- Clear, obscure, and custom glass is available.

Grids

SDL (Simulated Divided Lite).

GBG (Grids Between Glass).

Hardware

Hardware Colors; White, Black powder coat, and Brushed Chrome.

■ Extruded Vinyl Colors



■ Optional Exterior Stocked Colors



■ Optional

- Black Interior and Exterior Specialty Laminate


Featuring **WINSHIELD**



■ Optional Exterior Stocked Colors



SENTRY™ Multi-point lock

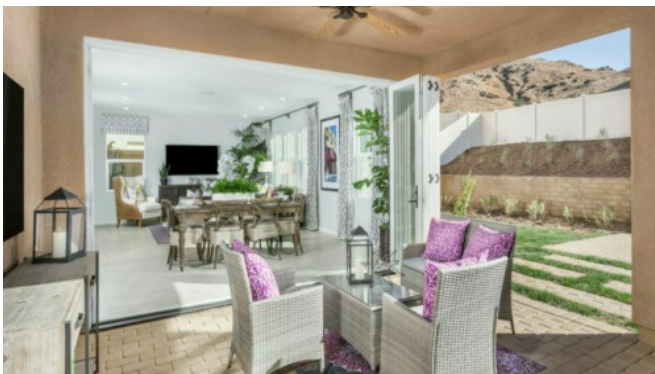

Centor® Architectural E3 Hardware

3750 Folding Door System



Example of folding door configuration

Features and Benefits

- Vinyl Frame with aluminum reinforcement.
- Foam backed seal on main frame.
- Contemporary style vinyl sash with internal aluminum reinforcement.
- Welded sash corners.
- Dual interlocking weather seal on sash for superior air and thermal performance.
- Centor Architecture™ E3 hardware system.
- Stainless multipoint locking hardware.

■ Sizes

- New construction / replacement.
- Custom applications.

■ Glass Options

- Cardinal™ LoE 366® dual glazed tempered glass.
- Warm-edge spacer system.
- Clear, obscure, and custom glass is available.

■ Grid Options

- SDL (Simulated Divided Lite).
- GBG (Grids Between Glass).

■ Hardware Options

- Hardware colors; white, black powder coat, and brushed chrome.

■ Extruded Vinyl Colors



Sentry™ Multi-point lock


■ Optional Exterior Stocked Colors



■ Optional

- Black Interior and Exterior Specialty Laminate

Featuring **WINSHIELD**

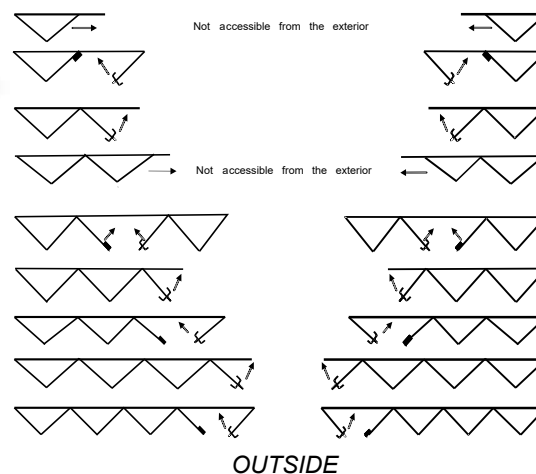

Keyed Access Panel




Introducing keyed access on even panel configurations

Simple ease of use function allowing keyed access on even panel configurations
Practical design, bringing the outdoors in with more options for more opening sizes
Contact your WinDor representative for more information



Exterior Access Configurations and Colors

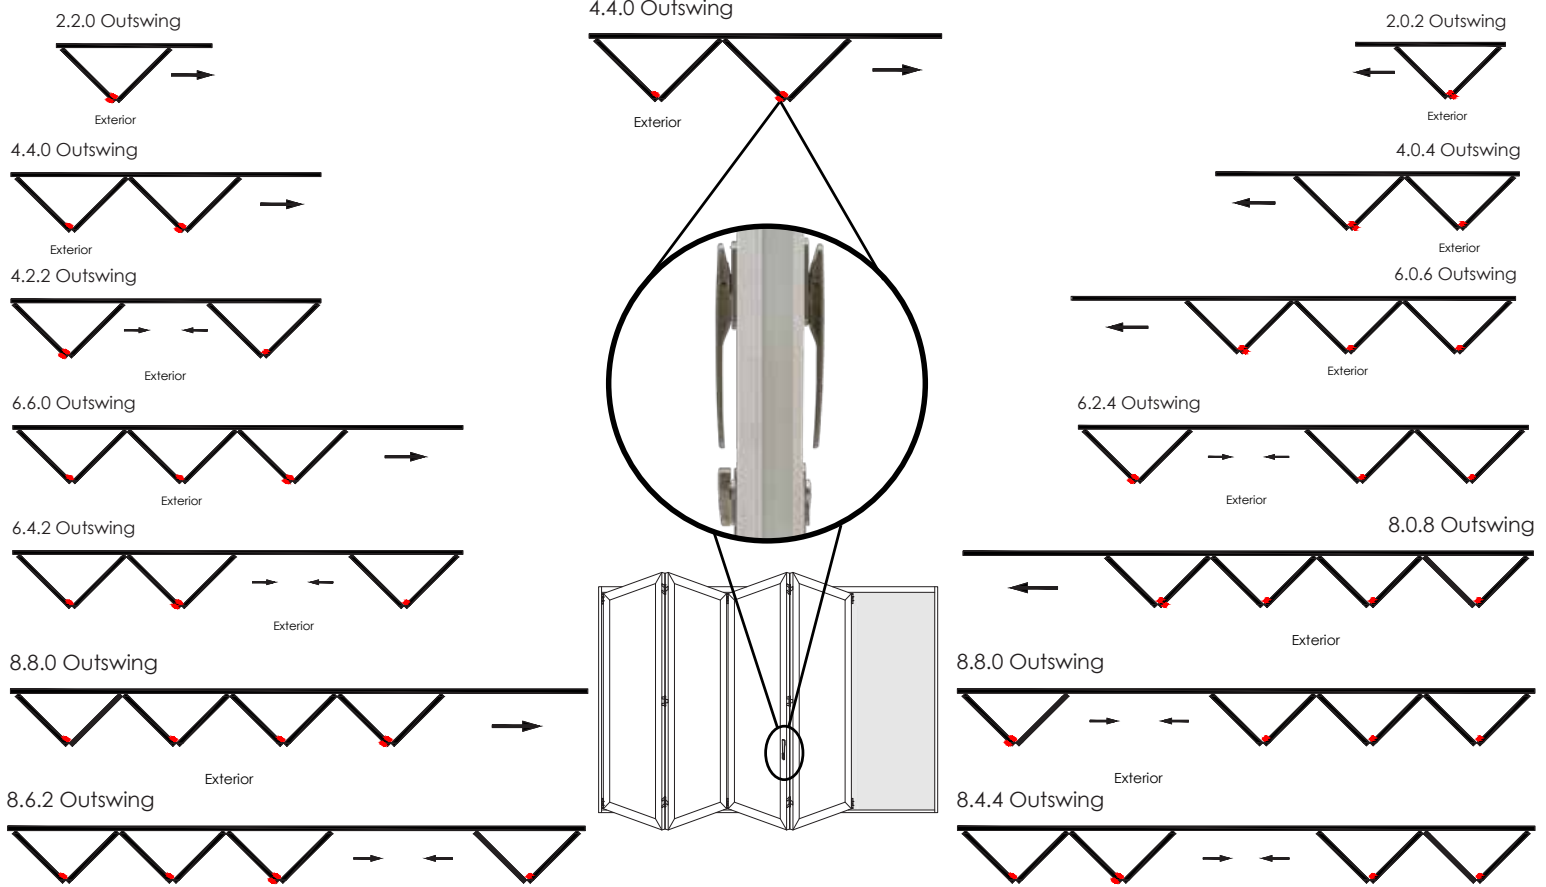



2750 and 3750 Folding Window System



Features and Benefits

- Vinyl frame with aluminum.
- Foam backed seal on main frame.
- Contemporary style vinyl sash.
- Welded sash corners.
- Dual interlocking weather seal on sash for superior air and thermal performance.
- Centor™ E3 hardware system in stainless and black powder coat finish.
- Stainless multipoint locking hardware Internal multipoint shoot bolt system.

■ Glass Options

- Cardinal™ 366® LoE dual glaze with warm edge spacer system.
- Clear, obscure, and custom glass is available.

■ Hardware

- Hardware colors; white, black powder coat, and brushed chrome.

■ Grids

- SDL (Simulated Divided Lite).
- GBG (Grids Between Glass).

■ Sizes

- New construction / replacement custom applications.

■ Extruded Vinyl Colors




■ Optional Exterior Stocked Colors



■ Optional

- Black Interior and Exterior Specialty Laminate
- Featuring **WINSHIELD**

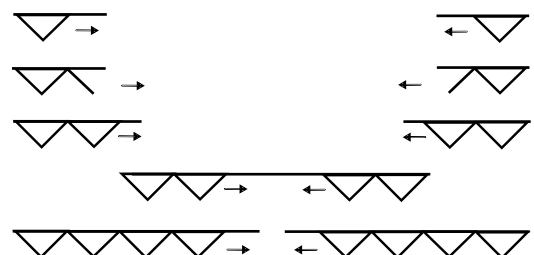

Drawings show out-swing operation

4750 Aluminum Multi-Slide Door System



Create the true experience of indoor outdoor living with industry-leading aluminum multi-slide patio doors.

Our high-performance stacking multi-slide patio doors feature narrow, uniform sightlines to help you achieve your exact project vision.

SPECIFICATIONS

Panel Sizes

- Width: Min 24", Max 72"
- Height: Min 60", Max 144"

Frame Sizes

- Width: Min 43.5", Max 360"
- Height: Min 60", Max 144"

Configurations

- 2 to 5 one-way stacking panels
- Additional configurations to come

Attachment Method

- Block Frame

Performance

- PG 20
- U-factor 0.28-0.32
- SHGC 0.22

Sills

- Flush – 3/4"
- Performance – 1-1/2"

Stucco Returns

- 1"
- 1-3/8"

Sightline

- 2.43"

4750 Aluminum Multi-Slide System

FRAME FINISHES





HARDWARE






FINISH OPTIONS





SILLS



CROSS SECTION

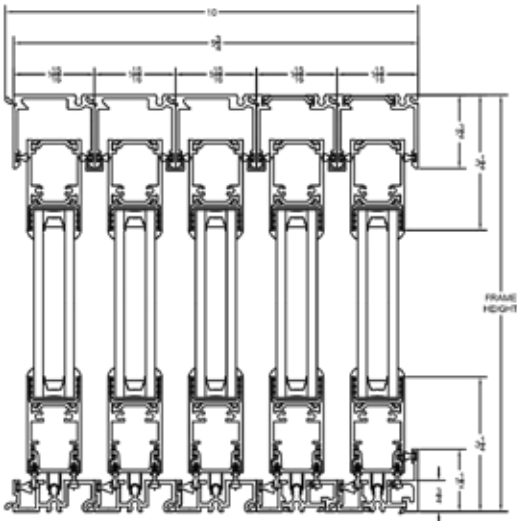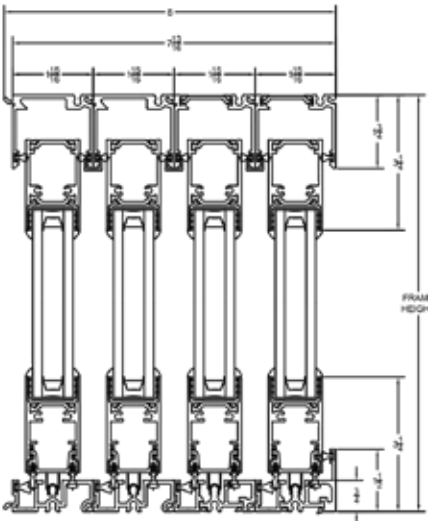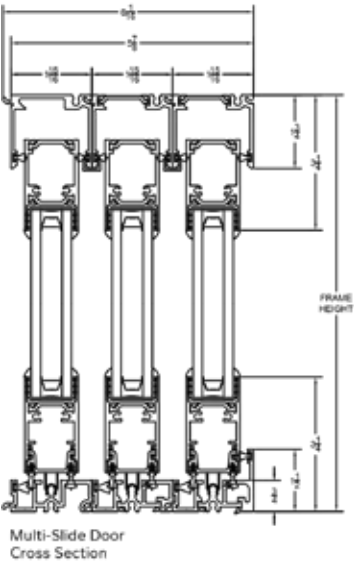

4750 Aluminum Pivot Door System

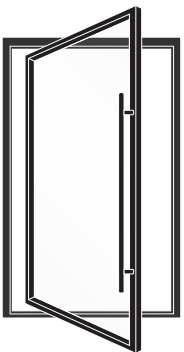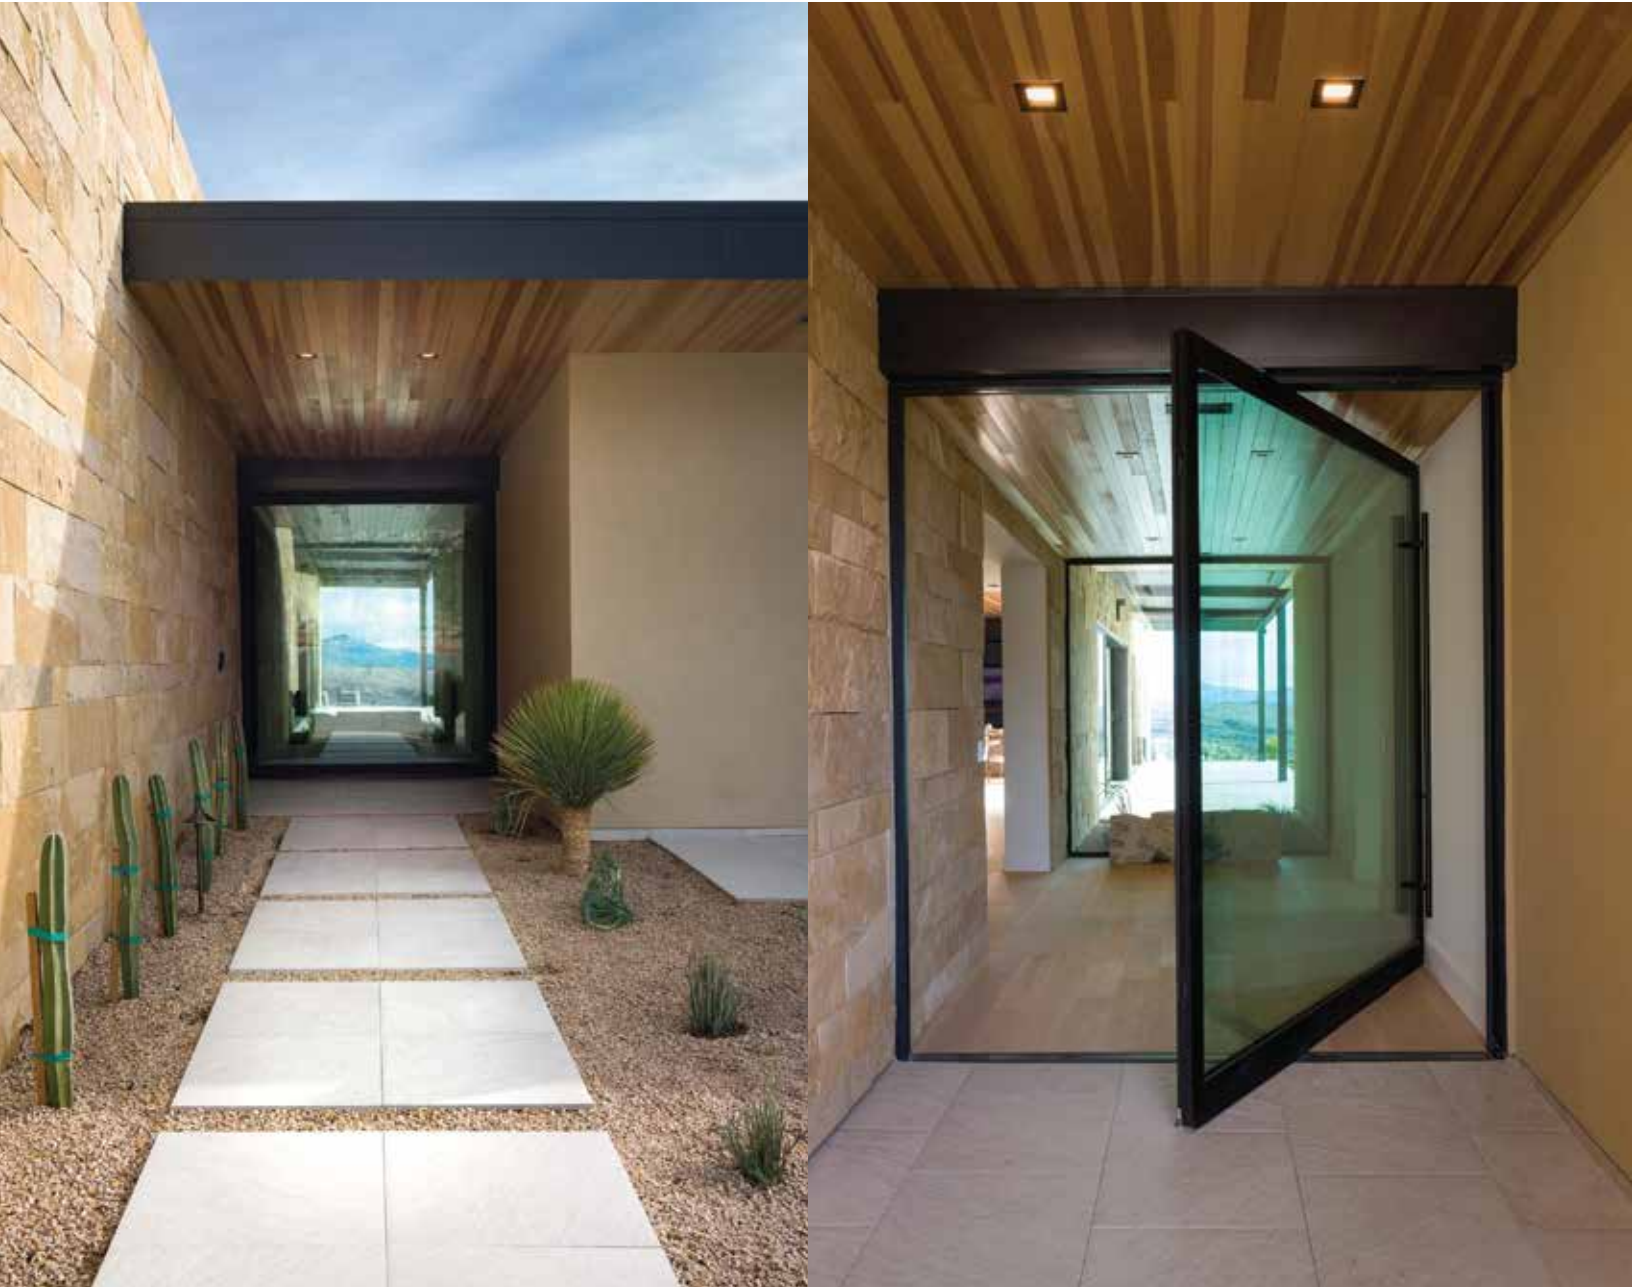

Add timeless sophistication to your design with the true modern styling of an aluminum pivot door. With superior performance and options for every design, our pivot door solutions achieve your design vision without compromise.

* Sizes shown above are rough opening sizes and pricing listed are for those sizes specifically. Custom quotes available upon request. Pricing is effective through 12/31/2024 and is valid for specific Ganahl Lumber locations only.

4750 Aluminum Pivot Door System

SPECIFICATIONS

5mm Insulating Glass Sizes*

- Max: 5'x9', 4.5'x10'

6mm Insulating Glass Sizes*

- Max: 5'x10', 180lbs.

* Larger sizes coming soon

Product Dimensions

- Standard: 5-1/4" bottom rail with 3-1/4" stiles and top rail
- Custom: 5-1/8" stiles and top rail

Configurations

- Left- or right-handed
- Interior or exterior pivot

Attachment Method

- Block Frame

FRAME FINISHES



Satin Anodized




Black Anodized

HARDWARE

- Standard: 48" or 72" Ladder Pull Bar
- Roller Catches with Deadbolt
- FritsJurgens Pivot System
- Custom: Electronic Deadbolt

HARDWARE FINISH OPTIONS



Satin Nickel (F42-R)




Matte Black (F9714)

CROSS SECTION



Ladder Pull

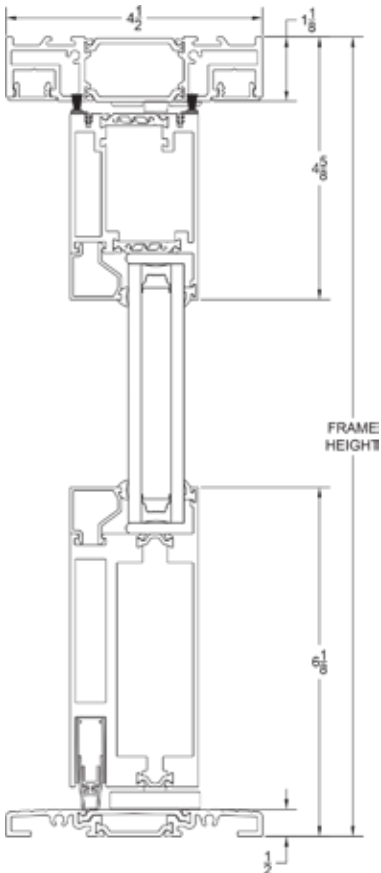

Pivot Door Cross Section



*Allow yourself to bring the outdoors in or the indoors out.
For new construction, replacement, and new add-on.*



WinDor is a proud member of the following



The National
Fenestration
Rating
Council



American
Architectural
Manufacturer
Association

www.windorsystems.com

20201309